



## SEAUX INDUSTRIELS

Ouverture = 8 3/8" diamètre


### 409 (1 gal.)

Seau 61962

Couv. 63332 (Pression)

Couv. 63305 (Joint étanchéité T.S.)

CAPACITÉ		EMBALLAGE	
litres	gal. US	qté/PQT	qté/PAL
		400	1,200
		qté/BTE	qté/PAL
4.03	1.06	320	5,120
4.13	1.09	200	3,200

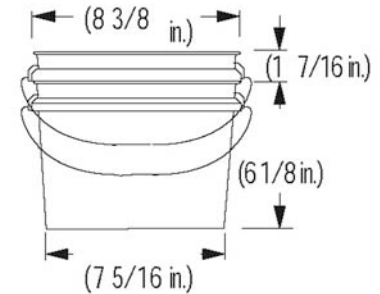


### 510 (1 1/4 gal.)

Seau 61964

Couv. 63332 (Pression)

Couv. 63305 (Joint étanchéité T.S.)

CAPACITÉ		EMBALLAGE	
litres	gal. US	qté/PQT	qté/PAL
		500	1,000
		qté/BTE	qté/PAL
5.10	1.35	320	5,120
5.13	1.35	200	3,200

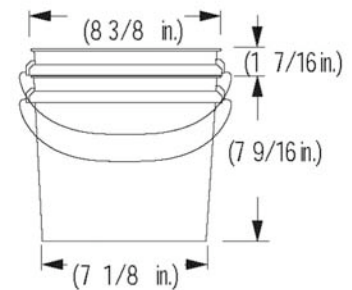

### 615 (1 1/2 gal.)

Seau 61958

Couv. 63332 (Pression)

Couv. 63305 (Joint étanchéité T.S.)

CAPACITÉ		EMBALLAGE	
litres	gal. US	qté/PQT	qté/PAL
		400	800
		qté/BTE	qté/PAL
5.77	1.51	320	5,120
5.82	1.53	200	3,200

